

Get a Quote

Overview

Huawei AR G3 AR200 Series router AR201 fixed interface access enterprise router AR0M0001BA00 provides routing and switching functionality for small business or branch offices. Huawei AR G3 AR0M0001BA00 equips 1 Fast Ethernet 10/100 WAN port, 8 Fast Ethernet 10/100 LAN ports,1USB and provides total 150Mbps system capacity. Dual-core processor separate data and control planes to ensure the high performance. Robust security feature include build-in, comprehensive authentication, defense mechanisms and a broad range of VPN options.

Quick Specification

Model	AR201
Part Number	02353839
Memory	512 MB
Flash	512 MB
Service interfaces (standard configuration)	WAN interface: one FE electrical interface LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface
Extended slots	Not supported
Weight	2.8 kg
Dimensions (W x D x H)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)


Product Details:

The Front Panel:



①	USB interface (host)
---	----------------------

The Back Panel:

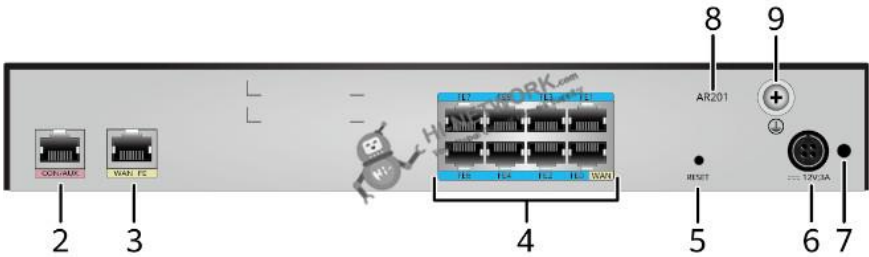

②	USB interface (host)
③	CON/AUX interface
④	WAN interface: FE electrical interface
⑤	LAN interfaces: eight FE electrical interfaces
⑥	RESET button
⑦	Power jack
⑧	Jack for power cable locking strap
⑨	Product model silkscreen
⑩	Ground point

Datasheet

The Accessories for AR201

Compare to Similar Items

Model	AR201	AR2220E
SIC Slots	0	4
Memory	512 MB	1 GB
Flash	512 MB	512 MB
Weight	2.8 kg (6.17 lb)	6 kg (13.2 lb)
Dimensions (W x D x H)	300.0 mm x 216.4 mm x 44.0 mm	442.0 mm x 420.0 mm x 44.5 mm

Get more information:

Do you have any question about the AR201 02353839?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02353839
Model	AR201
First Supported Version	V200R002C00
Processor	Dual-core, 533 MHz
Memory	512 MB
Flash	512 MB
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions (H x W x D)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Weight	2.8 kg
Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	3 A
Maximum output power	36 W
RPS power supply	Not supported
PoE power supply	Not supported



Datasheet

Maximum power consumption	12.3 W
Fan module	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces (standard configuration)	WAN interface: one FE electrical interface LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C (-40° F to +158° F)
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

