



Get a Quote

## Overview

S5720-28X-LI-DC - Huawei S5700 Series Switches.S5720-28X-LI-DC(24 Ethernet 10/100/1000 ports,4 10 Gig SFP+,DC -48V)


## Quick Specification

Model	S5720-28X-LI-DC
Part Number	98010582
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the <b>display version</b> command.
PoE	Not supported
Weight with packaging [kg(lb)]	4 kg (8.82 lb)
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>



**Product Details:**

**Appearance:**

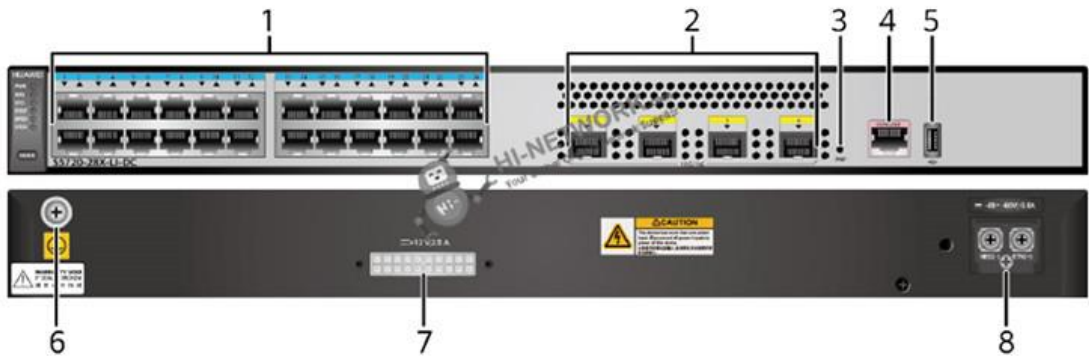

①	Twenty-four 10/100/1000BASE-T ports
②	Four 10GE SFP+ ports
③	One PNP button
④	One console port
⑤	One USB port
⑥	Ground screw
⑦	RPS socket
⑧	DC power terminal

Get more information:

Do you have any question about the S5720-28X-LI-DC 98010582?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

**Specific Data Sheet:**

Part Number	98010582
Model	S5720-28X-LI-DC
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the <b>display version</b> command.
Mean time between failures (MTBF)	45 years
Mean time to repair (MTTR)	2



## Datasheet

Availability	> 0.99999
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 1$ kV in differential mode, $\pm 2$ kV in common mode
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>
Weight (with packaging)	4 kg (8.82 lb)
Stack ports	Twenty-four 10/100/1000BASE-T ports and four 10G SFP+ ports
RTC	Not supported
RPS	Supported
PoE	Not supported
Rated voltage range	-48 V DC to -60 V DC
Maximum voltage range	-36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	31 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>Tested according to ATIS standard</li> <li>EEE enabled</li> <li>No PoE power consumption</li> </ul>	19.8 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 47 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification



S5720-28X-LI-DC (98010582)



## Datasheet

### Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

### Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223