



## Overview


The NetEngine AR6000 series routers provide a broad range of options for customers of all sizes across industries to best suit their extensive application scenarios. The NetEngine AR6100 series is ideal for midsize branches.

## Quick Specification

Table 1 shows the quick specification.

Model	AR6121E
Part Number	02353TBH, 02353TBH-001
Description	AR6121E, 2*GE combo WAN, 1*10GE(SFP+) WAN, 8*GE LAN, 1*GE combo LAN, 2*USB 2.0, 2*SIC
Dimensions with packaging (H x W x D)	90 mm x 570 mm x 390 mm (3.54 in. x 22.44 in. x 15.35 in.)
Weight with packaging	4.6 kg (10.12 lb)
Typical power consumption	27 W
Maximum power consumption	31 W


Figure 1 shows the appearance of AR6121E.

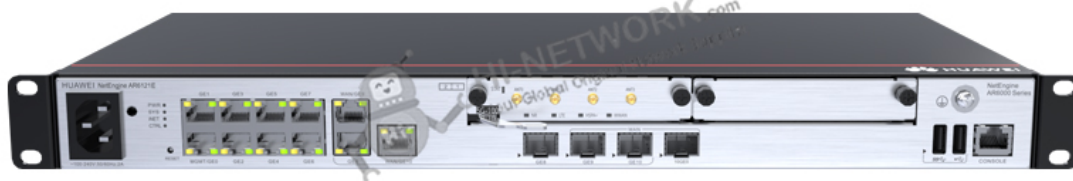



## Product Details

Figure 2 shows the structure of AR6121E.

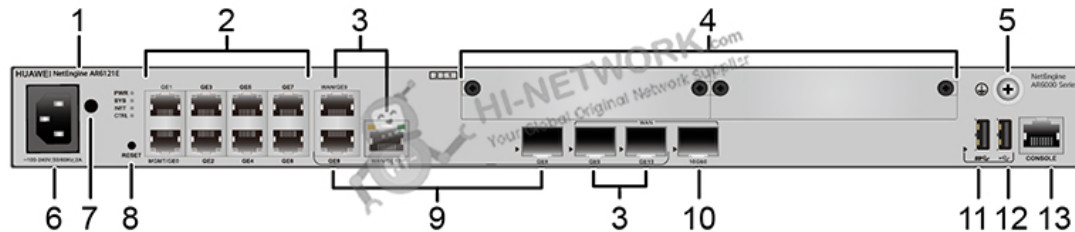

Note:

(1)	Product model silkscreen	(8)	RESET button
(2)	LAN interfaces: eight GE electrical interfaces	(9)	LAN interfaces: GE combo interface
(3)	WAN interfaces: two GE combo interfaces	(10)	WAN interface: one 10GE optical interface
(4)	Two SIC slots	(11)	USB interface 3.0 (host)
(5)	Ground point	(12)	USB interface 2.0 (host)
(6)	AC power jack	(13)	Console interface
(7)	Jack for power cable locking strap		

## Get More Information

Do you have any question about the AR6121E (02353TBH, 02353TBH-001)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

AR6121E Datasheet	
Model	AR6121E
Part Number	02353TBH, 02353TBH-001
Description	AR6121E, 2*GE combo WAN, 1*10GE(SFP+) WAN, 8*GE LAN, 1*GE combo LAN, 2*USB 2.0, 2*SIC
Installation type	Rack, Work bench, Against the wall
Chassis height [U]	1
Dimensions without packaging (H x W x D) [mm(in.)]	- Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 220.4 mm (1.75 in. x 17.4 in. x 8.68 in.)





	- Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 225.2 mm (1.75 in. x 17.4 in. x 8.87 in.)
Dimensions with packaging (H x W x D) [mm(in.)]	- Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 225.2 mm (1.75 in. x 17.4 in. x 8.87 in.) 90 mm x 390 mm x 570 mm (3.54 in. x 15.35 in. x 22.44 in.)
Weight with packaging [kg(lb)]	4.6 (10.12)
Weight without packaging [kg(lb)]	3.2 (7.04)
CPU	1.4 GHz, 4 Cores
Memory	4 GB
NAND Flash	1 GB
Console port	RJ45
RTC	Supported
LAN ports	8 x GE electrical, 1 x GE combo
WAN ports	1 x 10GE SFP+, 2 x GE combo
Number of service board slots	2
MIC slots (default/maximum)	0/0
SIC slots (default/maximum)	2/2
WSIC slots (default/maximum)	0/1
XSIC slots (default/maximum)	0/0
Redundant MPUs	Not supported
RPS input	Not supported
PoE	Not supported
IP rating	IP20
MTBF [years]	30.05
MTTR [hours]	2
Availability	0.9999924012
Typical power consumption [W]	28
Maximum power consumption [W]	33
Power supply mode	AC built-in
Number of power modules	1
Rated input voltage [V]	100 V to 240 V, 50 Hz/60 Hz
Input voltage range [V]	90 V to 264 V, 47 Hz to 63 Hz
Maximum input current [A]	2
Maximum output power [W]	70
Redundant power supply	Not supported
Types of fans	Built-in
Number of fan modules	1
Heat dissipation mode	Air cooling
Airflow	Left-to-right airflow
Noise at normal temperature (acoustic power) [dB(A)]	52.3
Long-term operating temperature [°C(°F)]	0°C to 45°C (32°F to 113°F) Note: When the altitude is 1800–5000 m (5906–16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722





	ft.).
Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Long-term operating altitude [m(ft.)]	< 5000 m (16404.2 ft.)
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)
Overtemperature alarm	Supported

## Want to Buy

[Get a Quote](#)[Learn More](#) about Hi-Network[Search](#) our Resource Library[Follow](#) us on LinkedInContact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

