


Overview

EA5800-X15 is the Huawei EA5800 model, supporting 15 service slots with backplane H901BPIB. Developed based on the distributed architecture, the Huawei SmartAX EA5800 series multiservice access device is positioned as the next-generation OLT for NG-PON. With virtual access technology, it provides a unified carrying platform for multiple services over one fiber network, such as broadband, wireless, video, and monitoring. The EA5800 provides GPON, XG-PON, XGS-PON, P2P GE, and 10GE access, and supports POL, FTTH, FTTB, and FTTC network construction modes. Thus it simplifies network architecture and reduces OPEX.

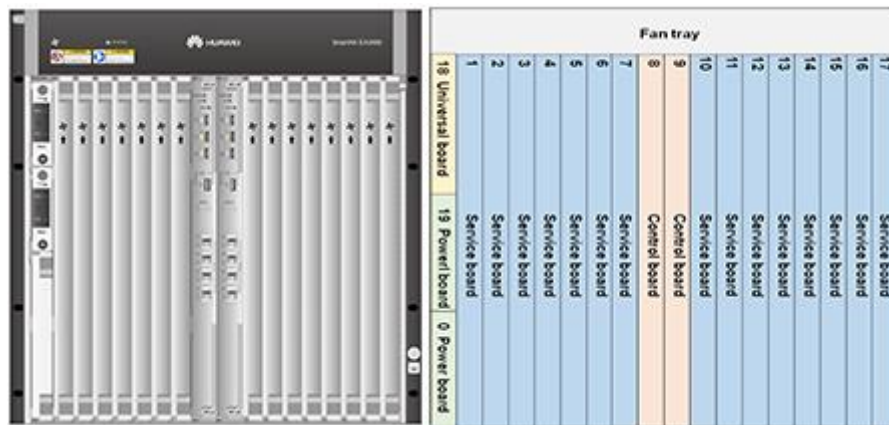

Slot Type	Slot No.	Total
Control board (SCU) slot	8,9	2
Power board slot	18,19	2
Universal interface board slot	0	1
Service board slot	1~7,10~17	16

Quick Specification

Model	Huawei SmartAX EA5800-X15
Supported Cabinets	N66E-22
Board Configuration	Control board slots: 8, 9 Service board or upstream interface board slots: 1 to 7, 10 to 17 Universal interface board slot: 0 Power board slots: 18, 19
Dimensions (W x D x H)	11U high and 19 inches wide Excluding mounting brackets: 442 mm x 287 mm x 486 mm Including mounting brackets: 482.6 mm x 287 mm x 486 mm
Maximum Input Current	60A
Power Supply Modes	DC power support (dual for backup)

Get a Quote

Working Voltage Range	-38.4V to -72V DC
Rated voltage	-48V/-60V
Switching Capacity of the Control Board (load sharing mode)	3.6 Tbit/s
Maximum Bandwidth per Service Slot (load sharing mode)	100 Gbit/s
System Layer 2 Packet Forwarding Rate (load sharing mode)	5,298 Mpps

Product Details:

The Front Panel:



Features Huawei SmartAX EA5800-X15 provides:

- ★ Distributed Architecture: High Performing and Non-blocking

The EA5800 distributes service processing on the control board to every service board, improving system switching capacity and performance. Each slot can support a throughput of up to 100 Gbit/s, ensuring smooth services without interruption. The EA5800 supports distributed caching for channel zapping and fast starting of HD videos.

- ★ Software Hitless Upgrade: Upgrade Anytime

In the distributed architecture, control and forwarding are isolated, ensuring that services are not interrupted during device upgrades. This also reduces user complaints. Devices can be upgraded at daytime.

- ★ High Reliability

[Get a Quote](#)

The EA5800 supports multiple protection mechanisms.

- Type B/type C dual-homing implements remote disaster recovery.
- 2 control boards and 2 power boards for redundancy.
- Dual-uplink protection.

★ Integrated Multiple Access Technologies

The EA5800 supports multiple access technologies, such as GPON, XG-PON, XGS-PON and P2P. Thus it is possible to carry multiple services on one optical network and save network construction costs.

Accessories For SmartAX EA5800-X15:

Supported Boards:

Category	Model	Description
Control Boards	H902MPLAE	Huawei SmartAX EA5800 Main Processing Board
	H901MPSCE	Huawei SmartAX EA5800 Main Processing Board
Universal Interface Boards	H901CIUA	Huawei SmartAX EA5800 Combo Interface Transfer Board
Service Boards	H901XGHDE	Huawei SmartAX EA5800 8-port Advanced XG-PON OLT Interface Board
	H901OGHK	Huawei SmartAX EA5800 48-port Advanced GE/FE Optical Interface Board
	H901OXHD	Huawei SmartAX EA5800 8-port Advanced 10GE Optical Interface Board
	H902OXHD	Huawei SmartAX EA5800 8-port Advanced 10GE Optical Interface Board
	H901GPSFE	Huawei SmartAX EA5800 16-port GPON OLT Interface Board
	H901OXEG	Huawei SmartAX EA5800 24 port Aggregationed 10GE/GE Optical Interface Board
	H901TWEDE	Huawei SmartAX EA5800 8-port Enhanced XGS-PON OLT Interface Board
	H901XSHF	Huawei SmartAX EA5800 16-port XGS-PON OLT Interface Board
Upstream Interface Board	H902GPHFE	Huawei SmartAX EA5800 16-port GPON OLT Interface Board
	H901NXED	Huawei SmartAX EA5800 8-port Enhanced 10GE Uplink Interface Board
Power Boards	H901PILA	Huawei SmartAX EA5800 Power Transfer Board
	H901PISA	Huawei SmartAX EA5800 Power Transfer Board
	H901PISB	Huawei SmartAX EA5800 Power Transfer Board
	H902PISB	Huawei SmartAX EA5800 Power Transfer Board

Get a Quote

FAN Monitoring Boards	H901FMLA	Huawei SmartAX EA5800 EA5800-X15/X17 fan tray
-----------------------	--------------------------	---

Compare To Similar Items:

Parameters	EA5800-X17	EA5800-X15	EA5800-X7	EA5800-X2
Board Configuration	Control board slots: 9, 10 Service board or upstream interface board slots: 1 to 8, 11 to 19 Universal interface board slot: 0 Power board slots: 20, 21	Control board slots: 8, 9 Service board or upstream interface board slots: 1 to 7, 10 to 17 Universal interface board slot: 0 Power board slots: 18, 19	Control board slots: 8, 9 Service board or upstream interface board slots: 1 to 7 Universal interface board slot: 0 Power board slots: 10, 11	Control board slots: 3, 4 Service board or upstream interface board slots: 1 to 2 Does not support universal interface board Power board slot: 0
Switching Capacity of the Control Board (load sharing mode)	3.6 Tbit/s	3.6 Tbit/s	3.6 Tbit/s	480 Gbit/s
Maximum Bandwidth per Service Slot (load sharing mode)	100 Gbit/s	100 Gbit/s	100 Gbit/s	80 Gbit/s
System Layer 2 Packet Forwarding Rate (load sharing mode)	5,298 Mpps	5,298 Mpps	5,298 Mpps	714 Mpps
Maximum Number of Concurrent 4K Video Users	16,000	16,000	8,000	2,000
Maximum Number of MAC Addresses	262,143	262,143	262,143	262,143
Maximum Number of ARP/Routing Entries	131,072	131,072	131,072	131,072
GPON Ports/ XG(S)- PON Ports	272	240	112	32
GE/FE Ports	816	720	336	96
10 GE Ports	408	360	168	16

Get more information:

Do you have any question about SmartAX EA5800-X15?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Model	EA5800-X15
Supported Cabinets	N66E-22
Board Configuration	Control board slots: 8, 9 Service board or upstream interface board slots: 1 to 7, 10 to 17 Universal interface board slot: 0 Power board slots: 18, 19
Dimensions (W x D x H)	11U high and 19 inches wide Excluding mounting brackets: 442 mm x 287 mm x 486 mm Including mounting brackets: 482.6 mm x 287 mm x 486 mm
Maximum Input Current	60A
Power Supply Modes	DC power support (dual for backup)
Working Voltage Range	-38.4V to -72V DC
Rated voltage	-48V/-60V
Ambient Temperature	-40°C to 65°C*. The EA5800 can start up at temperatures as low as -25°C. Note: The 65°C temperature refers to the highest temperature measured at the air intake vent of service subrack.
Ambient Humidity	5% RH to 95% RH
Atmospheric Pressure	70 kPa to 106 kPa
Altitude	4,000m. The air density varies with altitude and will affect the heat dissipation of a device. Therefore, the working environment temperature of the EA5800 varies with altitude.
Switching Capacity of the Control Board (load sharing mode)	3.6 Tbit/s
Maximum Bandwidth per Service Slot (load sharing mode)	100 Gbit/s
System Layer 2 Packet Forwarding Rate (load sharing mode)	5,298 Mpps
Maximum Number of Concurrent 4K Video Users	16,000
Maximum Number of MAC Addresses	262,143
Maximum Number of ARP/Routing Entries	131,072
Switching/Forwarding Delay	Short forwarding delay: The 100 Mbit/s Ethernet port sends 64-byte Ethernet packets at a delay shorter than 20 μ s.
Bit Error Rate (BER) in full load	A BER smaller than 10e-7 for a port that transmits data in full load.
System Reliability Specifications	System availability for typical configurations: > 99.999% Mean-Time-Between-Failures (MTBF): About 45 years. Note: Due to different network environments and different boards used by devices, the preceding MTBF (45 years) of the EA5800 is only for reference. The average repair time for Field



Get a Quote

	Replaceable Units (FRUs) is about 2 hours. The preceding values are only for reference. For details, please contact the relevant Huawei engineers.
GPON Ports/ XG(S)-PON Ports	240
GE/FE Ports	720
10 GE Ports	360

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

