

[Get a Quote](#)

Overview

S5735-L48P4X-A is the Huawei S5735-L switch with 48 x 10/100/1000BASE-T ports, 4 x 10 GE SFP+ ports, PoE+. Huawei CloudEngine S5735-L is a series of simplified gigabit access switches that provide 12–48 flexible all-GE downlink ports and four fixed GE or 10 GE uplink ports. They are designed for enterprise campus network access and gigabit to the desktop. Built on next-generation, high-performance hardware and powered by Huawei's Versatile Routing Platform (VRP), CloudEngine S5735-L switches feature flexible Ethernet networking, diversified security control, and support for multiple Layer 3 routing protocols — providing higher performance and more powerful service processing capabilities for networks.

Quick Specification

Table 1 shows the Quick Specification.


Model	S5735-L48P4X-A
Part Number	98010944
Software Version	V200R019C00 and later versions
Description	S5735-L48P4X-A bundle (48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, PoE+, 1*1000W PoE AC power module)
Fixed Ports	48 x 10/100/1000BASE-T ports, 4 x 10 GE SFP+ ports
PoE+	Supported

Figure 1 shows the appearance of S5735-L48P4X-A.



Product Details

Figure 2 shows the front ports of S5735-L48P4X-A.

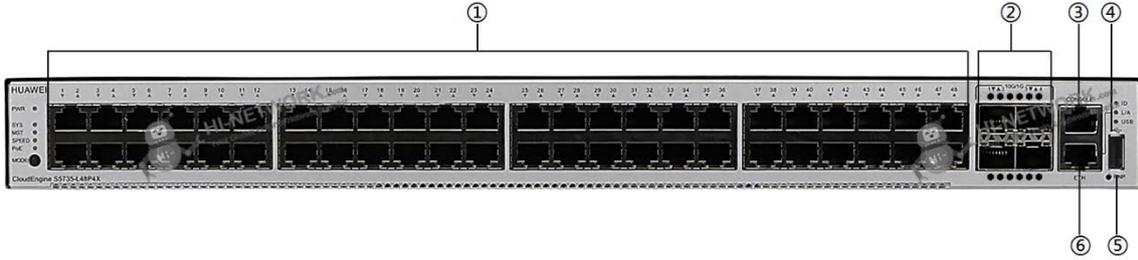

Note:

(1)	Forty-eight 10/100/1000BASE-T ports	(4)	One USB port
(2)	Four 1000BASE-X ports	(5)	One PNP button
(3)	One console port	(6)	One ETH management port

Figure 3 shows the back view of S5735-L48P4X-A.



Note:

(1)	Ground screw
(2)	Power module slot

Supported Transceivers

Table 2 shows the recommended models.

Model	Description
OMXD30000	Huawei Optical Transceiver OMXD30000, SFP+, 10G, Multi-mode Module (850nm, 0.3km, LC)
OSX010000	Optical Transceiver, SFP+, 10G, Single-mode Module (1310nm, 10km, LC)
SFP-GE-LX-SM1310	Optical Transceiver, eSFP, GE, Single-mode Module (1310nm, 10km, LC)
OSXD22N00	Optical Transceiver, SFP+, 10G, Multi-mode Module (1310nm, 0.22km, LC, LRM)

SFP-10G-USR	10GBase-USR Optical Transceiver, SFP+, 10G, Multi-mode Module (850nm, 0.1km, LC)
OMXD30009	Transceiver, QSFP+, 1310nm, 41.25Gbps, -7dBm, 2.3dBm, -11.5dBm, LC, SMF, 10
SFP-10G-LR	Huawei Optical Transceiver SFP-10G-LR, SFP+, 10G, Single-mode Module (1310nm, 10km, LC)

Compare to Similar Items

Table 3 shows the comparison.

Model	S5735-L12T4S-A	S5735-L24T4S-A	S5735-L24T4X-A	S5735-L48T4S-A	S5735-L48T4X-A	S5735-L32ST4X-A
Forwarding Performance	24 Mpps	42 Mpps	96 Mpps	78 Mpps	132 Mpps	108 Mpps
Switching Capacity	32 Gbit/s/336 Gbit/s	56 Gbit/s/336 Gbit/s	128 Gbit/s/336 Gbit/s	104 Gbit/s/432 Gbit/s	176 Gbit/s/432 Gbit/s	144 Gbit/s/432 Gbit/s
Fixed Ports	12 x 10/100/1000Base-T ports, 4 x GE SFP ports	24 x 10/100/1000Base-T ports, 4 x GE SFP ports	24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports	48 x 10/100/1000Base-T ports, 4 x GE SFP ports	48 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports	24 x GE SFP ports, 8 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports
PoE+	CloudEngine S5735-L12P4S-A : Supported CloudEngine S5735-L24P4S-A : Supported CloudEngine S5735-L24P4X-A : Supported CloudEngine S5735-L48P4X-A : Supported Other: Not supported					

Get More Information

Do you have any question about the S5735-L48P4X-A (98010944)?

Contact us now via info@hi-network.com.

Specification

S5735-L48P4X-A Specification	
Part Number	98010944
Software Version	V200R019C00 and later versions
Description	S5735-L48P4X-A bundle (48*10/100/1000BASE-T ports, 4*10GE SFP+ ports, PoE+, 1*1000W PoE AC power module)

Forwarding Performance	132 Mpps
Switching Capacity ²	176 Gbit/s/432 Gbit/s
Fixed Ports	48 x 10/100/1000BASE-T ports, 4 x 10 GE SFP+ ports
Dimensions without packaging (H x W x D) [mm(in.)]	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 420.0 mm (1.72 in. x 17.40 in. x 16.54 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 444.2 mm (1.72 in. x 17.40 in. x 17.49 in.)
Chassis height [U]	1
Weight with packaging [kg(lb)]	8.7
Typical power consumption [W]	59
Typical heat dissipation [BTU/hour]	201.31
Maximum power consumption [W]	- Without PoE: 80 W - Full PoE load: 914 W (PoE: 874 W)
Maximum heat dissipation [BTU/hour]	- Without PoE: 262.7 - PoE full load: 5667
MTBF [year]	61.7
MTTR [hour]	2
Availability	>0.99999
Noise at normal temperature (acoustic power) [dB(A)]	58.9
Noise at normal temperature (acoustic pressure) [dB(A)]	43.8
Number of card slots	0
Number of power slots	1
Number of fans modules	2
Redundant power supply	Not supported
Long-term operating temperature [°C(°F)]	-5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature [°C(°F)]	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Restriction on the operating temperature variation rate [°C(°F)]	When the altitude is 1800–5000 m (5906–16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.). The device can work for a short period of time when the operating temperature is beyond the normal range, but the following conditions must be met: - The operating temperature can exceed 50°C (122°F) for a maximum of 96 consecutive hours in a year. - The total time when the operating temperature exceeds 50°C (122°F) in a year is less than or equal to 360 hours. - The number of times the operating temperature exceeds 50°C (122°F) is less than or equal to 15 in one year. If any of the preceding conditions is not met, the device may be damaged or an unknown error may occur. Devices cannot start when the temperature is lower than 0°C (32°F). The maximum transmission distance of an optical module used for short-term operation cannot exceed 10 km.
Storage temperature [°C(°F)]	-40°C to +70°C (-40°F to +158°F)

Long-term operating relative humidity [RH]	5% to 95%, noncondensing
Long-term operating altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Storage altitude [m(ft.)]	0-5000 m (0-16404 ft.)
Power supply mode	Pluggable power supply
Rated input voltage [V]	- AC input: 100 V AC to 130 V AC, 200 V AC to 240 V AC; 50/60 Hz - High-voltage DC input: 240 V DC - DC input: -48 V DC to -60 V DC
Input voltage range [V]	- AC input: 90 V AC to 290 V AC; 45 Hz to 65 Hz - High-voltage DC input: 190 V DC to 290 V DC - DC input: -38.4 V DC to -72 V DC
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
Console port	RJ45
Eth Management port	RJ45
USB	Supported
RTC	Not supported
RPS input	Not supported
Service port surge protection [kV]	Common mode: ± 7 kV
Power supply surge protection [kV]	- Configured with AC power modules: ± 6 kV in differential mode and ± 6 kV in common mode - Configured with DC power modules: ± 2 kV in differential mode and ± 4 kV in common mode
Types of fans	Built-in
Heat dissipation mode	Heat dissipation with fan, intelligent fan speed adjustment
Airflow direction	Air intake from left, front and right, air exhaustion from behind
PoE	Supported
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


S5735-L48P4X-A (98010944)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

